

Chain separator

Purpose:

- cordoning off road surfaces,
- marking of traffic narrowings,
- kerb function,
- marking of lanes,
- organisation of islands and roundabouts

Place of production:

Poland

Material:

SBR rubber granulate

PUR resin (colourless/coloured)

Dimensions:

length	600 mm
width	160 mm
height	160 mm

Weight:

11,0 kg




Colour:

black/ yellow/ red/ white

Technical parameters:

Parameters	Value	Unit	Standard / Method
Tensile strength	$\geq 1,0$	MPa	PN-ISO 37 PN-EN ISO
Hardness	$\geq 55 \pm$	°ShA	868:2005 of nominal
Tolerance - length, width	2 ± 2	%	of nominal
Tolerance - height	± 2	%	of nominal
Tolerance- weight		%	

Technical drawings:

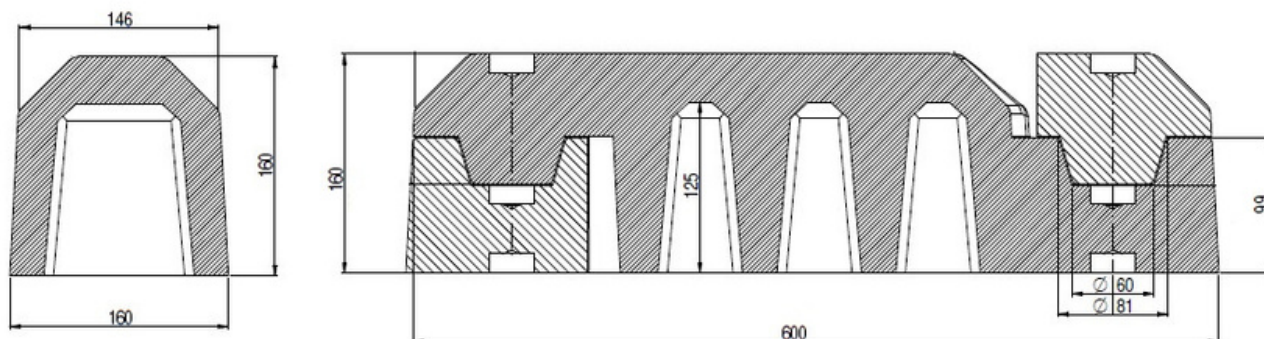

Packing:

Packed on a Euro pallet in quantities of 40 pieces.

Description on the pallet with the name of product, quantity, batch number and packing date.

Other packaging is possible on request

Identification:

Product- on the underside of the product information about the date of production.

Pallet- product name, quantity, pallet identification number, packing date, quality control stamp.

Storage:

The products should be stored on pallets in protective film and protected from external weather conditions.

The products may be stored for a longer period of time only in closed, ventilated rooms without humidity, after removing the protective film. Storage temperature: max 40 oC

Health, safety and fire conditions:

Conditions for storage and use of the product- must meet all requirements for storage and use of rubber materials.